


PRESSURE FILTER HOLDERS (IN-LINE)

Polypropylene in-line holders and aerosol in-line holders are compatible with a wide range of chemicals and temperatures, while **PFA in-line filter holders** are ideal for use with chemically aggressive liquids and dual support screens.

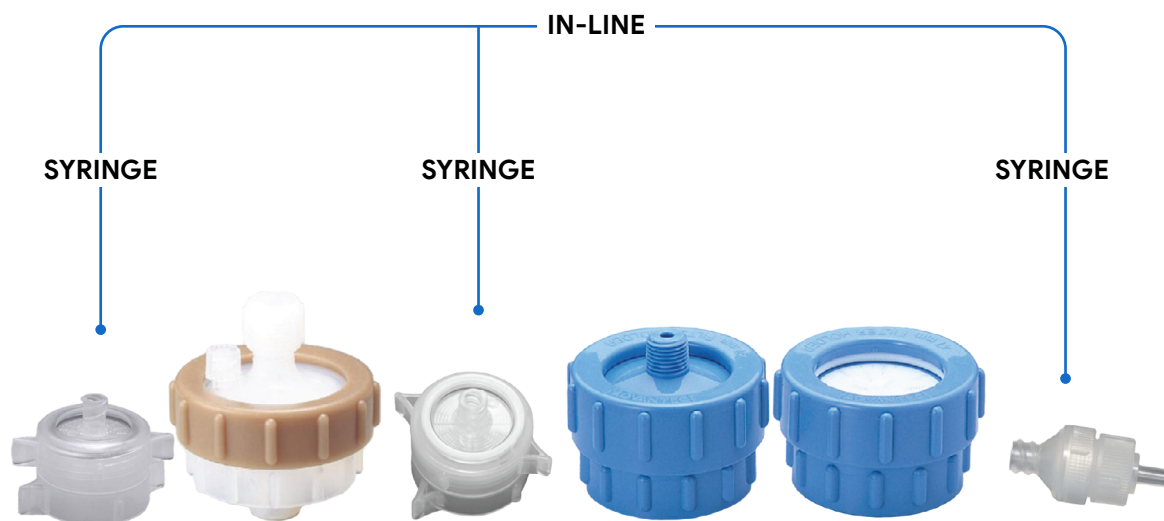

	PFA 25	PFA 47	PP 25	PP 47	PPO 47	SWINNEX
Body Material	PFA		Polypropylene			
O-Ring	Perfluoroelastomer		Silicone		Silicone, PTFE	Silicone
Inlet	F Luer-Lock	Combo: 1/4 in (6.4 mm) NPTM, 1/4 in (6.4 mm) tubing adapter	F Luer-Lock	Combo: 1/4 in (6.4 mm) NPTM, F Luer-Slip	Open-Face	F Luer-Lock
Outlet	M Luer-Slip	Combo: 1/4 in (6.4 mm) NPTM, 1/4 in (6.4 mm) tubing adapter	M Luer-Slip	Combo: 1/4 in (6.4 mm) NPTM, F Luer-Slip	Combo: 1/4 in (6.4 mm) NPTM, F Luer-Slip	M Luer-Slip
Pressure Inlet	42 psi (2.9 bar)	42 psi (2.9 bar)	71 psi (4.9 bar)	71 psi (4.9 bar)	Not Tested	40 psi (2.8 bar)
Pressure Differential	42 psi (2.9 bar)	42 psi (2.9 bar)	42 psi (2.9 bar)	71 psi (4.9 bar)	Not Tested	Not Tested
Membrane Size	25 mm	47 mm	25 mm	47 mm	47 mm	13 mm
Prefilter Size	21 mm	42.5 mm	21 mm	42.5 mm	Not Tested	10 mm
Weight	22 g (0.8 oz)	120 g (5.2 oz)	12 g (0.41 oz) 6/Pk	47 g (1.7 oz) 6/Pk	47 g (1.7 oz) 6/Pk	Not Tested
Filtration Area	3.5 cm ² (0.54 in ²)	13.5 cm ² (2.1 in ²)	3.5 cm ² (0.54 in ²)	13.5 cm ² (2.1 in ²)	13.5 cm ² (2.1 in ²)	0.7 cm ² (0.1 in ²)
Max. Temp.	250°F (121°C)	250°F (121°C)	176°F (80°C)	176°F (80°C)	176°F (80°C)	Not Tested
Max. Autoclave Temp.	250°F (121°C) 15 min	250°F (121°C) 15 min	250°F (121°C) 20 min slow exhaust	250°F (121°C) 20 min slow exhaust	250°F (121°C) 20 min slow exhaust	250°F (121°C) 20 min, 15 psi