

U-COO

Remote Temperature Monitoring Device

Remote Temperature Recording:

The external temperature sensor measures the temperature, records and stores the measured temperature values automatically, and transmits them to the platform through GPRS, secure remote platform monitoring.

Application Scenarios

It can be used for real-time monitoring of warehousing and distribution of food, medicine, vaccine, blood, reagents, biological products, biological sample tissue and other items. The application scenarios include refrigerated trucks, incubators, cold rooms, cold packs, refrigerated cabinets, refrigerators and freezers as key examples.

Cloud Platform Website

<http://ems.haierbiomedical.com>




Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Product Features

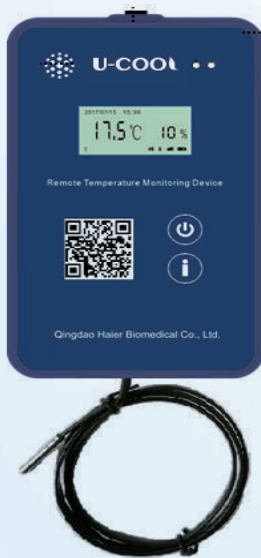

- Once powered on, the device immediately uploads the data automatically to the portal. Superior device, one simple activation - no technical skills needed, easy and user friendly.
- Remote portal management platform, which can track temperature, location, signal strength information and has multiple data analysis reports.
- One full charge, more than 10 days of battery life.
- The device supports sound and light alarms.
- USB data export (30 days temperature records).
- High precision, wide range of temperature measurements.
- IP65 protection, waterproof, shockproof and dustproof to fit a variety of complex environments.
- Complies with WHO Standards, WHO prequalified code: E006/060

Item	Specifications
Temperature sensor	NTC sensor: -40℃~+120℃ (±0.5℃ within -30℃ to +20℃, ±1℃ for other) PT100 sensor (optional): -200℃~+150℃ (±0.3℃)
Environment Sensor	Temperature: -10℃~+55℃ Humidity: 0%RH-99%RH
2G	850M/900M/1800M/1900M
4G	LTE FDD: B1/B3/B5/B8 LTE TDD: B38/B39/B40/B41 WCDMA: B1/B8 TD-SCDMA: B34/B39 GSM: 900/1800MHz CDMA: BCO
Storage capacity:	260,000 sets of data,
Battery	Charging voltage: 5V-12V Charging current ≤1.5A
Alarm	Audio-visual: Buzzer + LED light
SIM card	Built-in Nano SIM
Map location	Google map and LBS(Location Based Service)
USB	Micro USB: download data /Charging
Material	Shell: PC / Shell jacket: ABS
IP	IP65
Dimensions	114.5 mm *71.5 mm *22mm